

4 Plus 4 Bell Monitor Board

Features

- 4 Voltage Free Contacts
- 4 Switched Sounder Outputs
- All Outputs are Monitored and Programmable


Description

The 4 plus 4 Bell monitor Board is designed to expand the functions and Sounder and Bell output capabilities of the Ampac FireFinder™ Fire Alarm Control Panel.

The 4 plus 4 Bell Monitor Board comes with four voltage free changeover contacts and four switched sounder outputs.

The four sounder outputs are monitored for short and open circuit line conditions and the status of each output is reported back to the FireFinder panel.

Up to eight boards can be fitted in each FireFinder panel and each output can be individually controlled to turn on or off via the FireFinder panel or controlled by other FireFinder panels on a FireFinder network system.

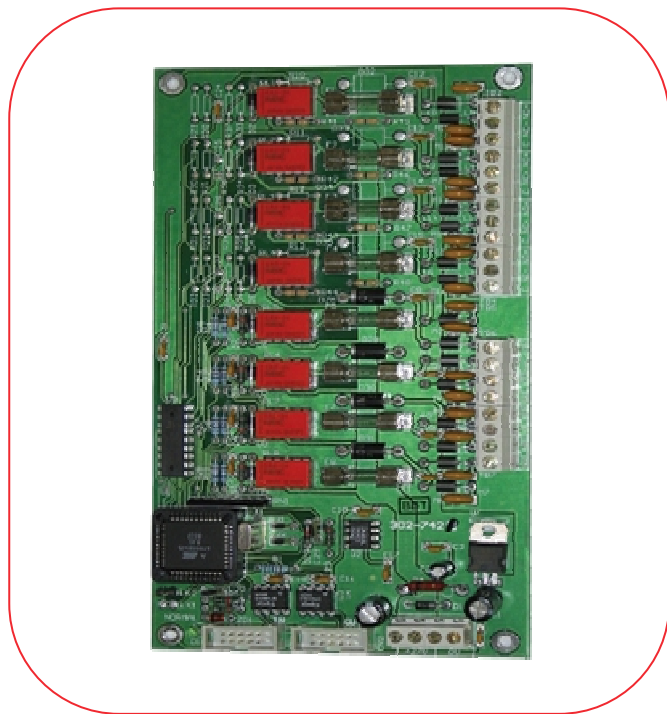

4 Plus 4 Bell Monitor Board

Item Numbers

159-0069 4 Plus 4 Bell Monitor Board

Specifications

Operating Voltage	24 - 27VDC
Quiescent Current	20mA
Sounder Output	1A @ 24VDC ea
Sounder Output EOL	10kΩ
Relay Contact	1A @ 24VDC ea
Max Number of Boards Per Firefinder Controller	8
Operating Temp.	-5°C - 55°C
Humidity	0 to 95% Non-condensing

