

Description:

The SGD2 (302-678) mounts by way of standoffs onto the backpan of the FACP to interface the NZ3200 FACP to the LTX Brigade monitoring facility.

The kit comes complete with all necessary components.

Installation:

Observe anti-static precautions at all times

1. Turn off the mains power and disconnect the battery.

2. Fit 4 standoffs to the predrilled holes in the backpan and mount the SGD as shown.
3. Fit the six way cable to CN2 of the SGD and CN1 of the Main Board.
4. Terminate LTX cables to the SGD, set the SDG address to that supplied by the monitoring facility and switch the NORMAL ISOLATE and NORMAL TEST switches to NORMAL.
5. Switch mains power on, connect the battery and test.

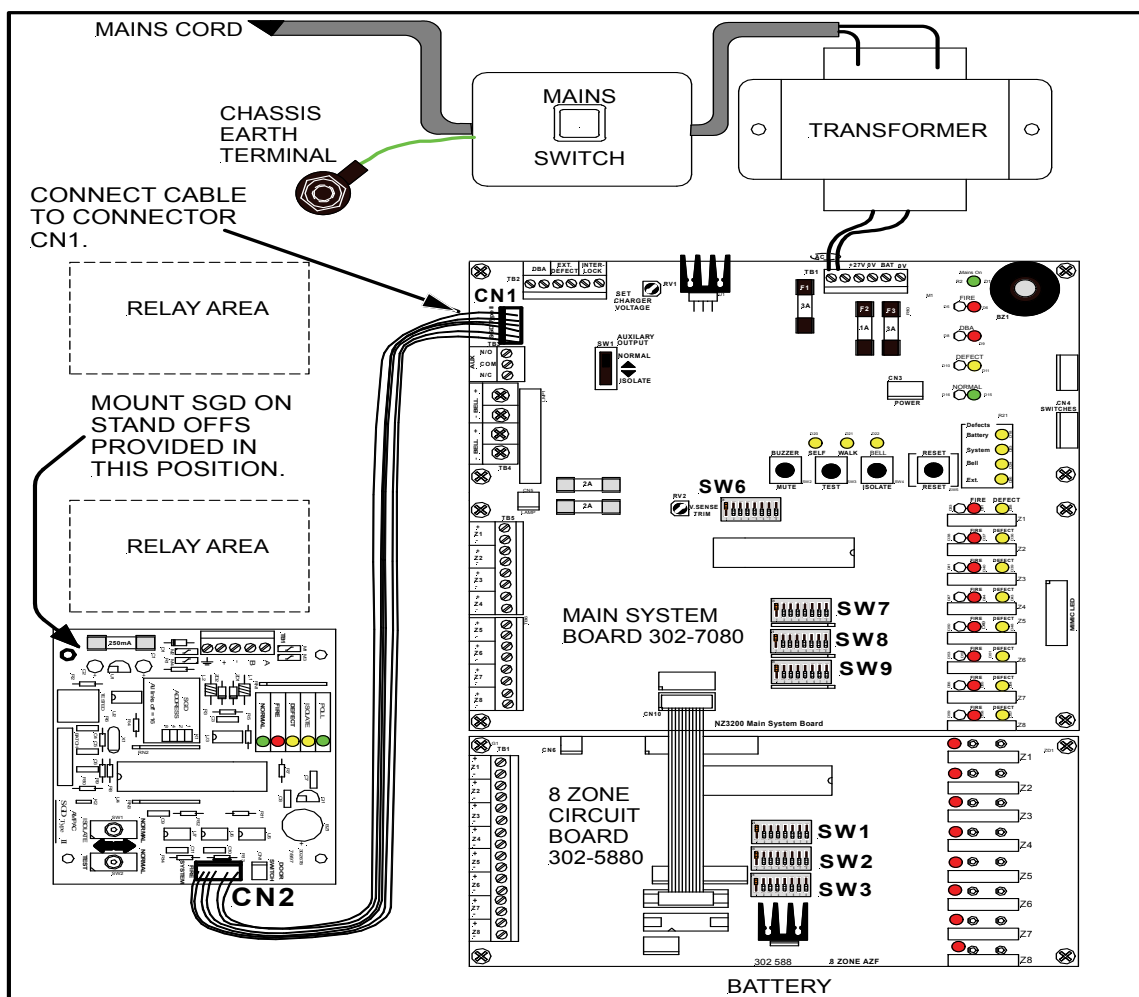


Figure 1: SGDII Typical Wiring Layout