

Fire detection and evacuation solutions that save lives.

Universal XPERT Address Card

Features

- Allows installation in all base types.
- Address pips have additional lead-in for higher tolerance.
- Simplifies and speeds up installation and commissioning.
- Address remains the same, no matter how often detectors are replaced.

Description

The Universal XPERT Address Card has been designed to allow the same card to be used on both XPERT 7 (XP95/Discovery) and XPERT 8 (Soteria Core) bases.

Addressing

To set an address using the Universal XPERT Address Card you have to remove the pips using a screwdriver. The pips are designed with numbers. Each pip is added together to provide the final address.

Note: When using the Universal XPERT Card with XP95 or Discovery devices, the 128 pip can be removed or left in-situ.

Specifications

Compatibility	XP95/Discovery/Soteria
Number of Pips	8
Pip Height	+0.01mm
Address Card to Detector Pip Contact Diameter	Ø1.7mm - 2mm
Break-Out Web on Pip	0.6mm (4x per pip)
Material	46000-005 (PC) White Colour

Item Numbers (Australia)


4106-2925 Blank Universal Xpert Card (Pk of 25)

Item Numbers (EMEA)

45682-800APO Blank Universal Xpert Card (Pk of 25)



Addressing examples

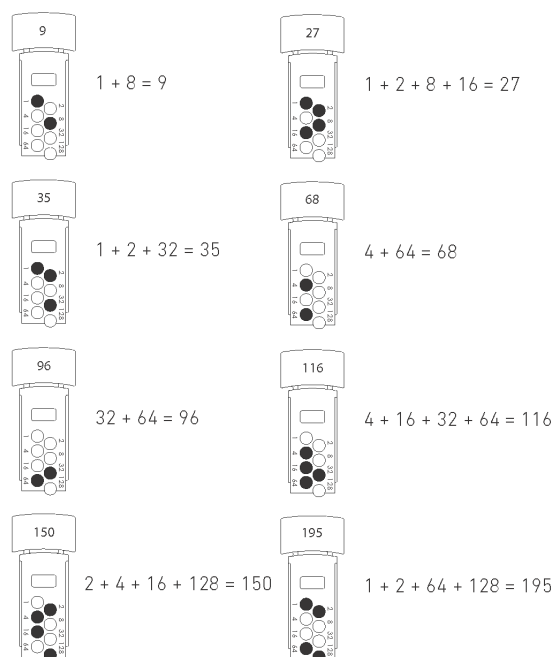

XPERT 8 Base with Universal XPERT Card Sectional View

